

Stock material positioning and measuring into the Tipo D50-F is accomplished with a positive rack and pinion system. Once the clamping of the material is confirmed, the stock length is automatically measured prior to the start of the fabrication process.



The Tipo D50-F includes with a miter-cutting circular saw with carbide inserts for maximum productivity. The saw can position automatically for miter cuts of up to 60° in either direction.

TECH SPECS

AUTOMATIC CNC HIGH SPEED DRILLING & SAWING LINE FOR FLATS, ANGLES AND CHANNELS	TIPO D50-F
Flat size [min.mm]	50x6
Flat size [max.mm]	500x25
Drilling heads [no.]	2
Drilling tools per head [no.]	8
Drilling diameter [max.mm]	40 (50)
Spindle speed [max.RPM]	3500
Spindle power [kW]	19 (27)
Cutting unit	Circular saw (mitering)

Please review FICEP's terms and conditions of sale and system specifications that are in our formal proposal. The manufacturer reserves the right to change specifications and features from those indicated in this brochure. Current specifications and features are part of the formal quotation. The raw material mentioned on this catalogue are in accordance with the following standards: UNI EN 10025 for technical conditions; UNI EN 10056-1 - UNI EN 10056-2 for dimensional tolerances; UNI EN 1090 for pieces execution tolerances.






FICEP S.p.A. - HEADQUARTERS via Matteotti, 21 21045 GAZZADA SCHIANNO VA ITALY TEI +39 0332 876111 Fax +39 0332 462459

email: ficep@ficep.it www.ficepgroup.com

FICEP France
FICEP Iberica
FICEP UK
FICEP DE
FICEP Russia
FICEP Corporation
FICEP Mexico
FICEP Algerie
FICEP Sul America Service

FICEP Middle East - Dubai Office FICEP Middle East FICEP Hong Kong FICEP Guangzhou FICEP Austria Service FICEP India Service FICEP Korea Forge Service FICEP Japan

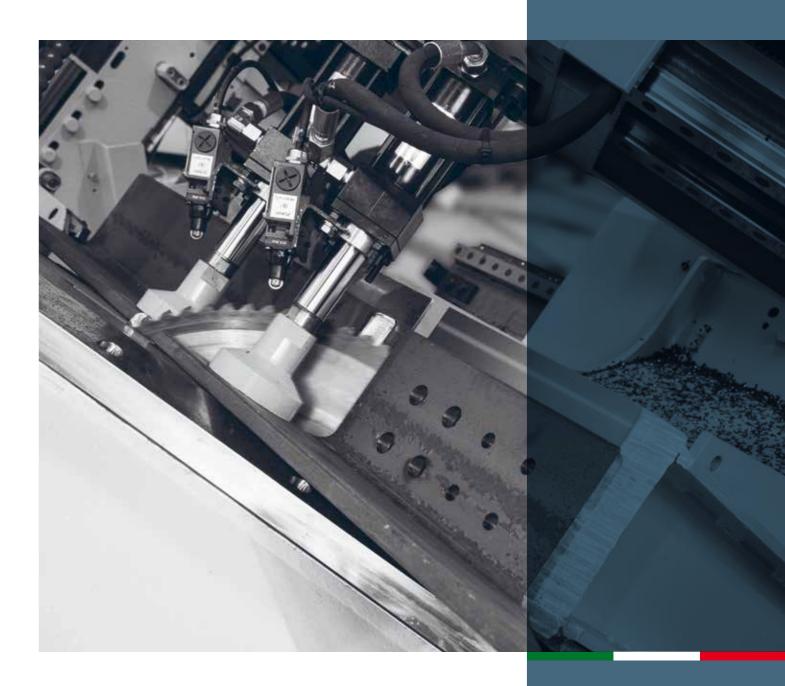





— TIPO D50-F

Automatic CNC high speed drilling & sawing line for flats, angles and channels













The addition of the innovative TIPO D50-F line extends our technological solutions to address the fabrication of miscellaneous shapes such as angles, flats and channels to a new level.

Prior to the introduction of the TIPO D50-F, the ability to generate a full complement of miscellaneous shapes that included miter cuts, marking, and holes was not possible.

The base system incorporates one or two high performance in line direct drive spindles driven by a 27 kW motor that delivers 100% of the power to the tool, at speeds up to 3.500 RPM.

Each spindle is equipped with a 200 mm sub-axis stroke so typical hole patterns can be produced without the need to unclamp, reposition and re-clamp the material for each linear

This sub-axis capability, in conjunction with the fact that the two spindles are in line, generates hole patterns in both legs of angles up to 180 mm simultaneously.

Each drill spindle includes an 8-position automatic tool changer to address diverse applications such as slotting, milling, tapping and more.





Pegaso is the latest generation CNC for Ficep lines where the PC, CNC and PLC are all integrated into a single circuit board for maximum reliability. Pegaso is based upon a field bus technology using CanBus and EtherCAT for controlling up to 32 separate CNC axes.



Angles with full miter cuts on both ends can be processed to generate typical

framing structures.

The versatility of processing flats up to 500 mm by 25 mm is exhibited with its ability to not only cut the part to length but also clip the corners as required.







Prior to cutting the part to length, a programmable marking unit can be

